

Surface Mount Back Light

HHMA-25/30 [High-uniformity(高均一) model]

HHMA-25/30 -V [Narrow-angle(狭角配光) model]




* Electric Power Consumption 2.8W(White)
2.3W(Red)
2.7W(Blue)

(Note) Please do not remove the tags attached to the product.
Light-emitting part during lighting, please do not look directly.

(注) 製品に取り付けられているタグは外さないでください
点灯中の発光部は、直視しないでください

DC12V model	DC24V model
color	
White	White
W	W - 24
Red	Red
R	R - 24
Blue	Blue
B	B - 24

	Input voltage
High-uniformity model	DC12V
	DC24V
Narrow-angle model	DC12V
	DC24V

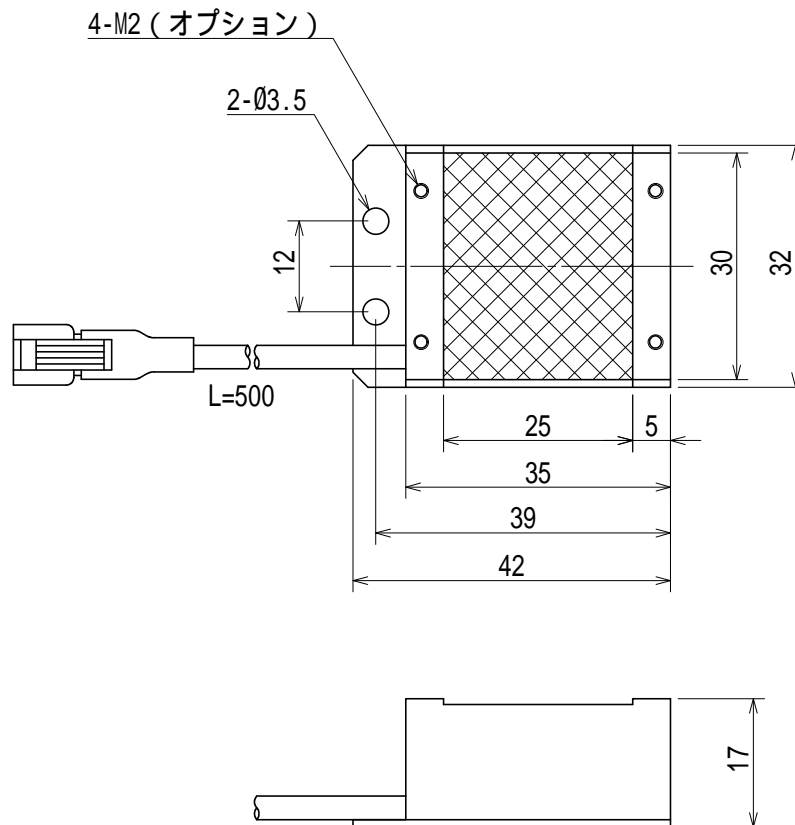

Details of Connector

DC12V		DC24V	
	1 + 2 -		1 + 2 NC 3 -
Connector	SMR-02V-B	Connector	SMR-03V-B
Contact	BYM-001T-P0.6	Contact	BYM-001T-P0.6