

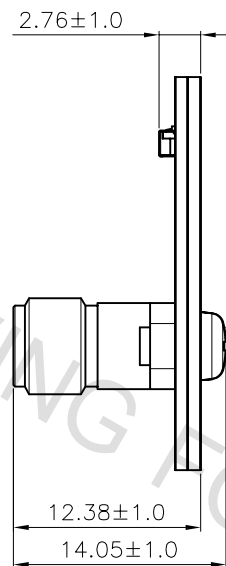
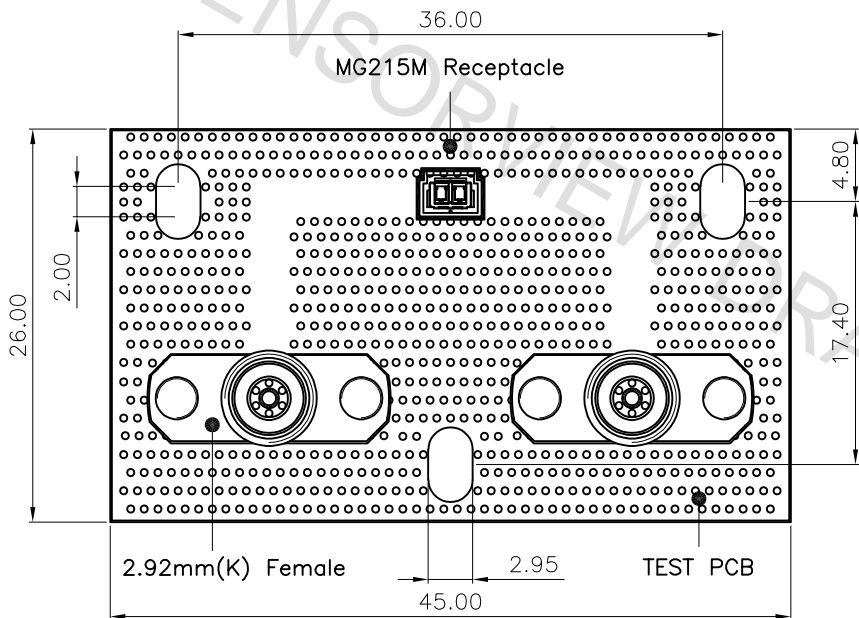


		REVISION	
NO.	CHANGE CONTENTS	CHANGE CAUSE	

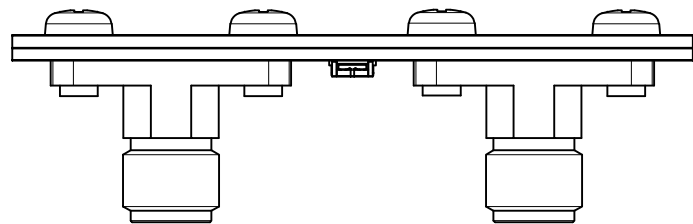

NOTES:

1. THIS TEST PCB IS FOR MG215M SERIES
2. CONN. MATERIAL
 - 2.1. MG215M RECEPTACLE
 - 2.1.1. HOUSING : Zn (Ni-Plated)
 - 2.1.2. SHELL : STS (Ni-Plated)
 - 2.1.3. C-CLIP : YCUT (Au-Plated)
 - 2.1.4. INSULATOR : LCP
 - 2.2 2.92mm(K) CONN.
 - 2.2.1. BODY : Bs (Au-Plated)
 - 2.2.2. PIN : BeCu (Au-Plated)
3. PCB MATERIAL
 - 3.1. FR-4
 - 3.2. Au-Plated
4. ELECTRICAL CHARACTERISTICS
 - 4.1. IMPEDANCE(Typ.) : 50Ω
 - 4.2. VSWR(MAX.) : 1.5, DC ~ 15GHz
 - 4.3. INSERTION LOSS(Min.) : -1.5dB, DC ~ 10GHz
 - 4.4. CROSSTALK(MAX.) : -50 dB, DC ~ 10GHz

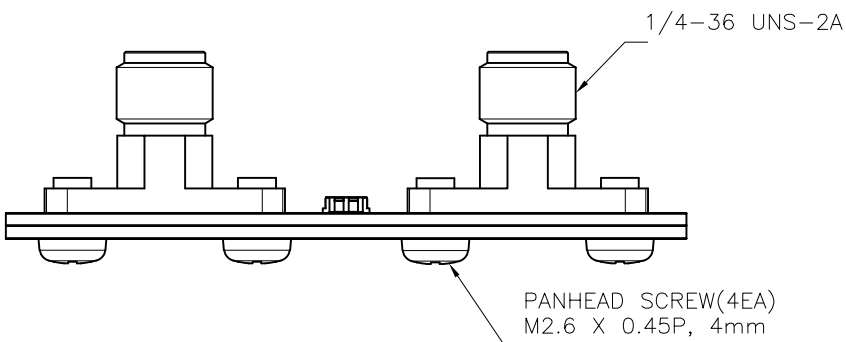

MATERIAL	See Note		DRAW	DESIGN	CHECK	APPRO.	TITLE
FINISH			<i>Jack</i>	<i>Lucas</i>	<i>Charlie</i>		MG215M SERIES TEST BOARD
TOLERANCE	Decimal	Angle	06/03	06/03	06/03	06/03	PART NO.
	±0.5						
SCALE	2/1	UNIT mm	MODEL	MG215M			
REVISION	DRAFT	SHEET	1	1			A4

